

PRODUCT DATASHEET

LED WORKLIGHT R-STAND SOCKET 50 W 4000 K

WORKLIGHTS R-STAND SOCKET (GEN 2) | Flexible, portable worklight with included power outlets



AREAS OF APPLICATION

- Outdoor use (IP44)
- Renovation
- Garages
- Basement
- Workshops

PRODUCT BENEFITS

- 2 in 1, worklight and multisocket
- Energy savings of up to 80% compared to halogen lamp worklights
- Semi-frosted, tempered glass cover for uniform illumination

PRODUCT FEATURES

- Equipped with two power outlets, for loads up to 3000 W
- Power outlet protected by self-closing cover
- Built-in switch to control the light, power outlets remain constantly powered
- Quick-release fastener for adjustment of luminaire head angle
- 3 m cable with type E/F plug



TECHNICAL DATA


Electrical data

| | |
|------------------------|---------------|
| Nominal wattage | 50.00 W |
| Operating mode | Mains voltage |
| Nominal voltage | 220...240 V |
| Mains frequency | 50/60 Hz |

Photometrical data

| | |
|----------------------------------|------------|
| Color temperature | 4000 K |
| Color rendering index Ra | ≥80 |
| Light color (designation) | Cool White |
| Luminous flux | 4500 lm |
| Luminous efficacy | 90 lm/W |

Dimensions & weight

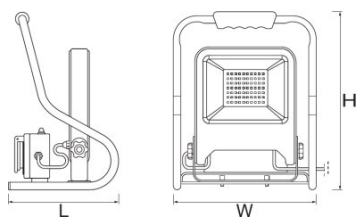

| | |
|-----------------------|-----------|
| Length | 278.0 mm |
| Width | 270.0 mm |
| Height | 375.0 mm |
| Product weight | 2720.00 g |

Colors & materials

| | |
|-----------------------|----------------|
| Body material | Aluminum/Steel |
| Housing color | Dark gray |
| Product color | Dark gray |
| Housing color | Dark gray |
| Cover material | Glass |

Temperatures & operating conditions

| | |
|----------------------------------|--------------|
| Ambient temperature range | -20...+45 °C |
|----------------------------------|--------------|

Additional product data

| | |
|--------------------------|----------------------------|
| Mounting type | Standing |
| Mounting location | Floor |
| Product remark | Available from August 2019 |

Capabilities

| | |
|-------------------------------|------------------------------|
| Dimmable | No |
| Adjustable | Yes |
| Type of connection | Protective contact Plug type |
| LED module replaceable | Not replaceable |

Certificates & standards

| | |
|---------------------------|-------------------|
| Protection class | I |
| Type of protection | IP44 |
| Standards | CE/EAC/REACH/ROHS |

LOGISTICAL DATA

| Product code | Packaging unit (Pieces/Unit) | Dimensions (length x width x height) | Gross weight | Volume |
|---------------|------------------------------|--------------------------------------|--------------|-----------------------|
| 4058075321342 | Folding carton box 1 | 278 mm x 286 mm x 387 mm | 2933.00 g | 30.77 dm ³ |
| 4058075321359 | Shipping carton box 2 | 572 mm x 300 mm x 405 mm | 6983.00 g | 69.50 dm ³ |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.