
Art.-Nr. 730266

Recessed floor light
Soft Flex, 18 W, 3,000 K, silver

DEKOLIGHT

IP67 SDCM<5



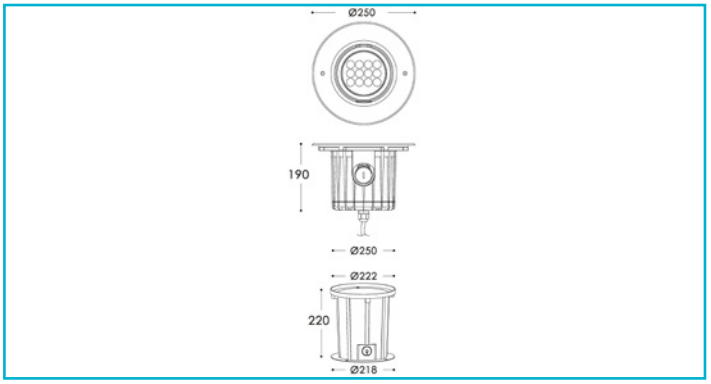


Special features

- Adjustable light emission angle
- Including 1 m connecting cable
- Including honeycomb filter

Housing Material	Stainless steel, Aluminium
Housing Color	Silver
Material of Lens	Glass
Mounting Type	Installation mounting
Mounting Location	Outside
Mounting Area	Bottom panel mounting
Functions	Driveable - 20 kN
Protection Class	Protection class I/ protective grounding
Rated Input	18.4 W
Rated Input Voltage Frequency	220-240 V/AC 50 / 60 Hz
Power Supply Unit incl.	Yes
Connection Cable Primary	Yes
Primary Connection	Connection box
Primary Cable Length	1 m
Dimmable	No
Motion Detector	No
Light Source	LED, Light source not changeable
Color Temperature	3000 K
Colour Consistency	5 SDCM
Colour consistency light source	5 SDCM
CRI (Ra)	80
Rated Luminous Flux	770 lm
Luminous Efficiency	41.8 lm/W
Rated Angle of Reflection	25 Degree
Light Distribution	Symmetric
Distribution Characteristic 120°	DLS
Swivel Angle	60 Degree
Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Top

Height	190 mm
Diameter	250 mm
Installation Depth	220 mm
Cut Out Diameter	222 mm
Product weight	4816 g
Working Temperature	-20 to 40 °C
Storage Temperature	-10 to 60 °C
IP Protection Class	IP 67
Load Force max.	20 kN
Max. units per MCB B10	40 PCS
Max. units per MCB B16	64 PCS
Max. units per MCB C10	64 PCS
Max. units per MCB C16	102 PCS
Life Time L70 / B50	35000 h
Switching Cycles	20000
Power Consumption	19 kWh/1000h
EEI	G



Deko-Light Elektronik-Vertriebs GmbH
Auf der Hub 2 | D-76307 Karlsbad
www.deko-light.com
deko@deko-light.com